CAMBRO

Camshelving® Premium Series

High Density Storage Floor Track System
High Density Mobile Starter Units
4 Vented or Solid Shelves

HEIGHTS	DEPTHS	LENGTHS
2	2	5
1700 mm 1910	540 mm 610	915 mm 1375 mm 1070 1525 1220

- **High Density Mobile Starter Units include:** 2 factory assembled mobile post kits, 8 shelf traverses, shelf plates, 4 high density casters, and 4 high density donut bumpers. Units ship complete in 1 box.
- **High Density Full Track Kits include:** Aluminum raised tracks, steel joiners, stationary unit end plates and leveling feet, pan head screws, and star washers.
- **High Density Track Extension Kits include:** Aluminum raised tracks, steel joiners, pan head screws and star washers.

Project _____


Item No. _____

Model No. _____

Quantity _____

camguard ANTIMICROBIAL SHELF PLATES

StoreSafe STORE FRESH

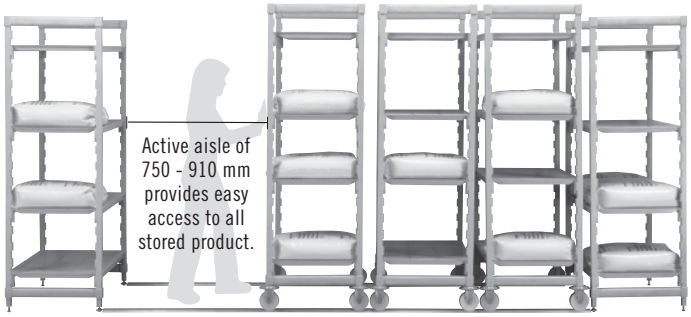

High Density Storage Floor Track System

Features & Benefits

- Increase storage capacity by adding storage aisles in open floor space. System composed of stationary starter units anchored to a raised floor track system at each end with high density mobile units installed on tracks.
- Withstands storage temperatures from -38˚C to 88˚C. Use in walk-in coolers, freezers, dry storage, warewashing areas, loading docks or front of the house. Impervious to moisture, chemicals, salt, food acids, and humidity.
- Posts and traverses have a steel core and smooth polypropylene exterior for superior strength and durability. Traverse dovetails are molded into posts.
  NOTE: Mobile units require Mobile Posts for assembly.
- Premium high density grooved caster rolls securely and easily on raised track.
- High density donut bumpers offer added protection when maneuvering high density mobile units back and forth on the track.
- Grooved track rails connect to bottom of stationary units with easy to install stainless steel hardware. No bolts, glue or drilling required.
- Aluminum tracks and stainless steel hardware are rust resistant. Track provides smooth and level surface for mobile units and is designed for easy cleaning.
- Removable polypropylene shelf plates have permanent, molded-in Camguard, an antimicrobial technology that inhibits the growth of mold, fungus and bacteria.
- Shelves connect and can be adjusted easily on the dovetails molded into posts every 10,2 cm.
- Recommend installing a stationary unit every 4,6 m of track to stabilize system.
- Posts, traverses and shelf plates wipe clean or can be run through a dishwasher.
- Lifetime warranty against rust and corrosion.
- Available in 1 color – Speckled Gray (480).

Premium Series Weight Bearing Capacity

Weight must be evenly distributed across the entire shelf.

		UNIT LENGTH 915 – 1220 MM
MOBILE UNIT	Unit only*	340 kg

* Due to the weight bearing capacity of casters, maximum weight load on an entire Mobile Unit is 340 kg.

Full Track and Extension Kits

CODE	DESCRIPTION	CASE PACK
Floor Track Kit		
CSMHDTK10	3,05 m Track for 3 Mobile Units*	1
CSMHDTK12	3,66 m Track for 4 Mobile Units*	1
CSMHDTK145	4,42 m Track for 5 Mobile Units*	1

Full Track Kits include: Track rails, joiners, 8 stainless steel leveling feet (for stationary units), end plates, and hardware to complete installation.

Floor Track Extension		
CSMHDTKE4	1,38 m Track Extension	1
CSMHDTKE5	1,53 m Track Extension	1
CSMHDTKE6	1,83 m Track Extension	1

Color: Silver (000). *Based on 610 mm deep mobile units.

Track Extension Kits include: Track rails (1 set), rail joiners, and hardware to complete installation.

Approvals

NSF COMPONENT

Post Connectors, Identification Tags, Security Cages, Single Shelf Sheet Pan/Tray Rack, Shelf Rails, Divider Bars, High Density Track and Extension Kits are not NSF Listed.

CAMBRO TRUSTED FOR GENERATIONS™
www.cambro.com

Information and specifications are subject to change without notice. Please confirm at time of order.

CAMBRO U.S.A.
TEL: 1(714) 848-1555
FAX: 1(714) 230-4375
international@cambro.com

© Copyright Cambro Manufacturing Company. Printed in the U.S.A. REV. 10/18

Camshelving® Premium Series

High Density Storage Floor Track System
High Density Mobile Starter Units
4 Vented or Solid Shelves


Project _____

Item No. _____

Model No. _____

Quantity _____

V4
4-Shelf Vented High Density Mobile Units



1700 mm HEIGHT


	CODE	DIMENSIONS D x L x H
540 mm DEPTH	CPHU213667V4	540 x 915 x 1700 mm
	CPHU214267V4	540 x 1070 x 1700
	CPHU214867V4	540 x 1220 x 1700
	CPHU215467V4	540 x 1375 x 1700
	CPHU216067V4	540 x 1525 x 1700
610 mm DEPTH	CPHU243667V4	610 x 915 x 1700 mm
	CPHU244267V4	610 x 1070 x 1700
	CPHU244867V4	610 x 1220 x 1700
	CPHU245467V4	610 x 1375 x 1700
	CPHU246067V4	610 x 1525 x 1700

1910 mm HEIGHT

	CODE	DIMENSIONS D x L x H
540 mm DEPTH	CPHU213675V4	540 x 915 x 1910 mm
	CPHU214275V4	540 x 1070 x 1910
	CPHU214875V4	540 x 1220 x 1910
	CPHU215475V4	540 x 1375 x 1910
	CPHU216075V4	540 x 1525 x 1910
610 mm DEPTH	CPHU243675V4	610 x 915 x 1910 mm
	CPHU244275V4	610 x 1070 x 1910
	CPHU244875V4	610 x 1220 x 1910
	CPHU245475V4	610 x 1375 x 1910
	CPHU246075V4	610 x 1525 x 1910

Color: Speckled Gray (480).

S4
4-Shelf Solid High Density Mobile Units



	CODE	DIMENSIONS D x L x H
540 mm DEPTH	CPHU213667S4	540 x 915 x 1700 mm
	CPHU214267S4	540 x 1070 x 1700
	CPHU214867S4	540 x 1220 x 1700
	CPHU215467S4	540 x 1375 x 1700
	CPHU216067S4	540 x 1525 x 1700
610 mm DEPTH	CPHU243667S4	610 x 915 x 1700 mm
	CPHU244267S4	610 x 1070 x 1700
	CPHU244867S4	610 x 1220 x 1700
	CPHU245467S4	610 x 1375 x 1700
	CPHU246067S4	610 x 1525 x 1700

	CODE	DIMENSIONS D x L x H
540 mm DEPTH	CPHU213675S4	540 x 915 x 1910 mm
	CPHU214275S4	540 x 1070 x 1910
	CPHU214875S4	540 x 1220 x 1910
	CPHU215475S4	540 x 1375 x 1910
	CPHU216075S4	540 x 1525 x 1910
610 mm DEPTH	CPHU243675S4	610 x 915 x 1910 mm
	CPHU244275S4	610 x 1070 x 1910
	CPHU244875S4	610 x 1220 x 1910
	CPHU245475S4	610 x 1375 x 1910
	CPHU246075S4	610 x 1525 x 1910

Optional Accessories

- ❑ Shelf Identification Tags
- ❑ Shelf Divider Panel
- ❑ Shelf Divider Bars (Straight or Angled)
- ❑ Shelf Rails
- ❑ Single Shelf Sheet Pan/Tray Rack
- ❑ Single Shelf Security Cage
- ❑ Full Wrap Security Cage
- ❑ Shelf Traverses (Single or Double)
- ❑ Drying and Storage Cradles

Architect Specs

Posts and Traverses: Internal steel core, reinforced polypropylene exterior.
Post Connectors: Reinforced polypropylene.
Shelf Plates: Reinforced polypropylene with permanent, molded-in Camguard® antimicrobial.
Corner Connectors: Reinforced nylon.
High Density Caster: Polyolefin resin with zinc plated post.

Approvals

NSF COMPONENT

Post Connectors, Identification Tags, Security Cages, Single Shelf Sheet Pan/Tray Rack, Shelf Rails, Divider Bars, High Density Track and Extension Kits are not NSF Listed.

Information and specifications are subject to change without notice. Please confirm at time of order.

CAMBRO
TRUSTED FOR GENERATIONS™
www.cambro.com

CAMBRO U.S.A.
TEL: 1(714) 848-1555
FAX: 1(714) 230-4375
international@cambro.com

© Copyright Cambro Manufacturing Company. Printed in the U.S.A. REV. 10/18