
SPECIFICATIONS

CCB1000-WHT/WHT-GG

2-dr Bottom Mount Merchandiser

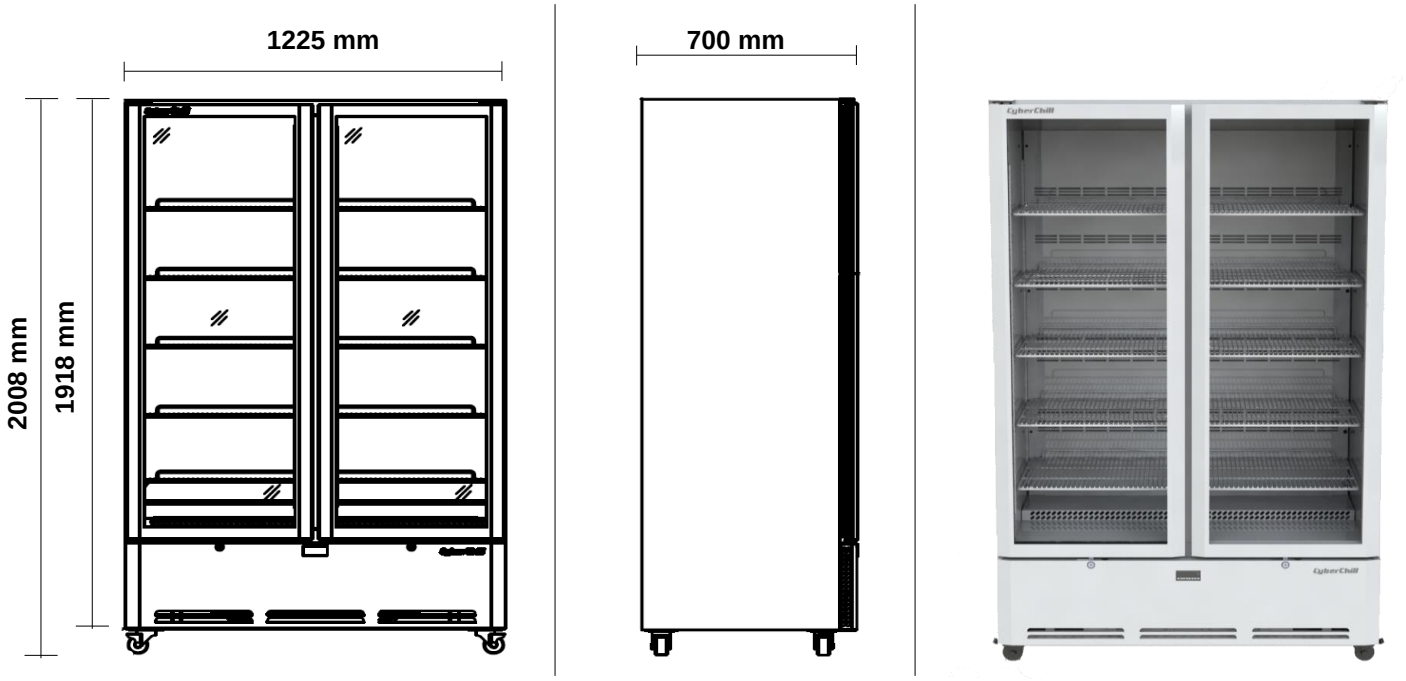

Specifications			
Refrigeration system	**Self-contained, bottom mounted, electronically controlled, refrigeration unit**		
Refrigerant	**R290**	Gas Charge	**118 g**
Electrical	**220-240 Volts a.c. 50 Hz**	Amps	**tbc**
Nominal capacity	**590 Watts @ -5°C SST**		
Drainage	**Waste heat vaporiser located in service compartment (no plumbing required)**		
Insulation	**50mm thick, high density CFC, HCFC & HFC free Zero ODP injected PUR insulation**		
Cabinet body	**White Powder Coated Steel Exterior & Interior, Galvanised Steel Back & Base**		
Cabinet temperature range	**+1°C to +4°C up to 40°C ambient**		
kWh/24hr	**3.89 kWh**	Star Rating	**8 Stars**
Cabinet internal volume	**1000 litres**	Net usable GN volume	**tbc**
Weight	**250 kg**	dBA	**tbc**
Lightbox	**n/a**		
Door Opening	**2 x Self-Closing Lockable Door(s)**		
Door Configuration	**2 x Double Glazed LowE Argon filled Glass Doors;**		
Shelves	**5 x shelves & adjustable tray slides per door**		**Total = 10**
Options	**Solid/Glass Doors, Legs/Castors, Black/White/SS Exterior, etc.**		
Cabinet dimensions	External	Internal	
Width	**1225 mm**	**1125 mm**	
Depth	**700 mm**	**610 mm**	
Height	**1918 mm** (excl. legs or castors)	**1445 mm**	