


SPECIFICATIONS
MCU423-UDDDD

CyberChill precision refrigeration

520 Series 4-Door Integral Counter Chiller

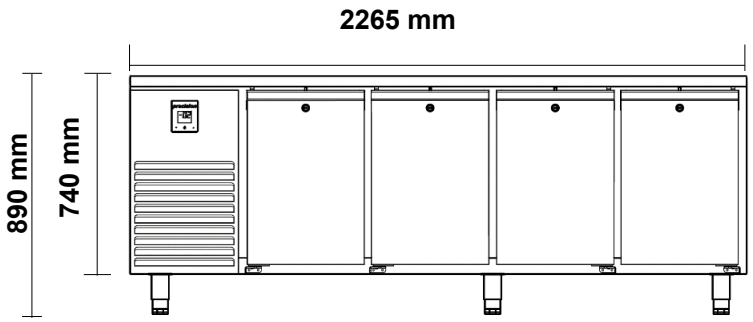



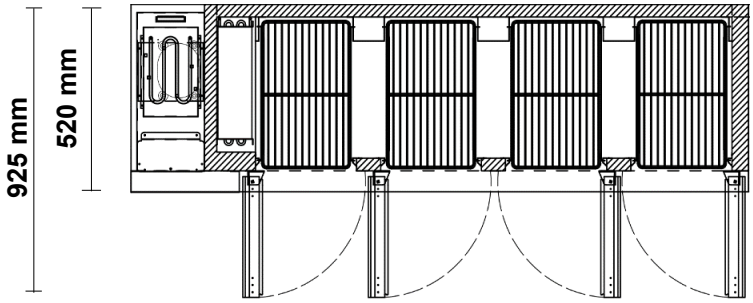



Specifications			
Refrigeration system	**Self-contained, side mounted, electronically controlled, refrigeration unit**		
Refrigerant	**R290**	Gas Charge	**86 g**
Electrical	**220-240 Volts a.c. 50 Hz**	Amps	**1.7 Amps**
Nominal capacity	**373 Watts @ -10°C SST**		
Drainage	**Waste heat vaporiser located in service compartment (no plumbing required)**		
Insulation	**60mm thick, high density Zero ODP injected polyurethane insulation**		
Cabinet body	**304 Stainless Steel Interior & Exterior, Galvanised Steel Back & Base**		
Cabinet temperature range	**-2°C to +4°C up to 43°C ambient**		
kWh/24hr	**4.47 kWh**	Star Rating	**tbc**
Cabinet internal volume	**240 litres**	Net usable GN volume	**tbc**
Weight	**185 kg**	dBA	**62**
Worktop	**Removable 40mm stainless steel worktop**		
Internal Door / Drawer GN Capacity	**4 x Door: Accepts full GN1/1 pans (325mm wide x 530mm deep)**		
Doors / Drawer Configuration	**4 x SS Lockable, Self-closing SS solid doors**		
Shelves	**2 x PVC-coated wire shelves & adjustable tray slides per door** **Total = 8**		
Options	**Glass Doors, Castors, SS Shelves, LED light, Half or Triple Drawers, etc.**		
Cabinet dimensions	External	Internal	
Width	**2265 mm**	**1745 mm**	
Depth	**520 mm**	**400 mm**	
Height	**700 mm** (excl. legs, castors & worktop)	**600 mm**	