Upright Storage Refrigerators with Split Solid Door

Features:


- Lockable self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Shelf to fit gastronorm pan size GN2/1
- Frequency/voltage: 50Hz/220-240 V
- Stainless steel finish exterior and interior
- Plastic coated steel shelves
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures from +16°C to +43°C

NEW GAS R290 ECO FRIENDLY

30 MONTH WARRANTY Parts & Labours

GSC652H



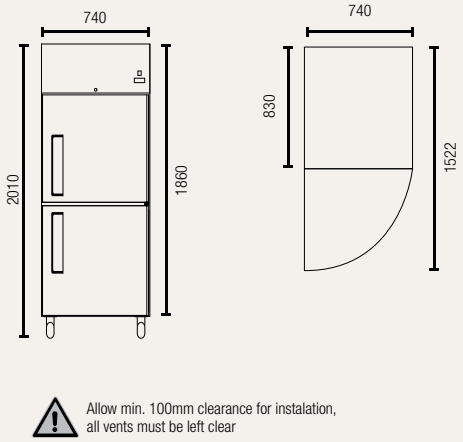


Allow min. 100mm clearance for instalation, all vents must be left clear

Gross volume: 685 L
Exterior dimensions in mm: 740w x 830d x 2010h
Number of adjustable shelves: 3

Temperature set range: -2°C to +8°C
Gross/net weight: 136/121 kg
Energy consumption in 24h: 3.1 kWh

GSC1412H



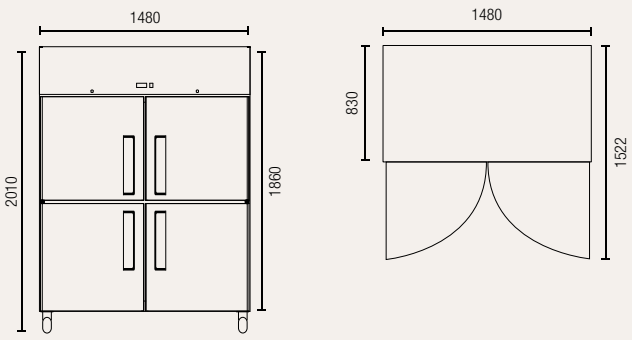

Allow min. 100mm clearance for instalation, all vents must be left clear

Gross volume: 1476 L
Exterior dimensions in mm: 1480w x 830d x 2010h
Number of adjustable shelves: 6

Temperature set range: -2°C to +8°C
Gross/net weight: 213/188 kg
Energy consumption in 24h: 4.3 kWh

All specifications are subject to change without prior notice