Underbench Storage Refrigerators with Solid Door - Slimline

Features:


- Self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Stainless steel finish exterior and interior
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel shelves
- Lockable engine compartment
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures +16°C to +43°C


NEW GAS R290 ECO FRIENDLY

30 MONTH WARRANTY Parts & Labours

SSC260H








Allow min. 100mm clearance for instalation, all vents must be left clear


Gross volume: 260 L
Exterior dimensions in mm: 1360w x 600d x 830h
Number of adjustable shelves: 2

Temperature set range: -2°C to +8°C
Gross/net weight: 92/83 kg
Energy consumption in 24h: 2.2 kWh

SSC400H








Allow min. 100mm clearance for instalation, all vents must be left clear


Gross volume: 386 L
Exterior dimensions in mm: 1795w x 600d x 830h
Number of adjustable shelves: 3

Temperature set range: -2°C to +8°C
Gross/net weight: 130/105 kg
Energy consumption in 24h: 3.1 kWh

SSC550H



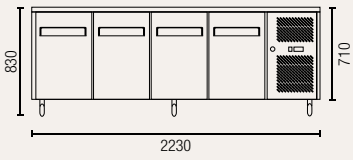



Allow min. 100mm clearance for instalation, all vents must be left clear

Gross volume: 511 L
Exterior dimensions in mm: 2230w x 600d x 830h
Number of adjustable shelves: 4

Temperature set range: -2°C to +8°C
Gross/net weight: 156/121 kg
Energy consumption in 24h: 4.7 kWh

All specifications are subject to change without prior notice