Underbench Storage Refrigerators with Solid Door

Features:


- Self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Shelf to fit gastronorm pan size GN1/1
- Stainless steel finish exterior and interior
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel shelves
- Lockable engine compartment
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures +16°C to +43°C


NEW GAS R290 ECO FRIENDLY

30 MONTH WARRANTY Parts & Labours

USC260H








Allow min. 100mm clearance for instalation, all vents must be left clear


Gross volume: 314 L
Exterior dimensions in mm: 1360w x 700d x 830h
Number of adjustable shelves: 2

Temperature set range: -2°C to +8°C
Gross/net weight: 119/102 kg
Energy consumption in 24h: 2.2 kWh

USC400H








Allow min. 100mm clearance for instalation, all vents must be left clear


Gross volume: 465 L
Exterior dimensions in mm: 1795w x 700d x 830h
Number of adjustable shelves: 3

Temperature set range: -2°C to +8°C
Gross/net weight: 140/121 kg
Energy consumption in 24h: 3.1 kWh

USC550H



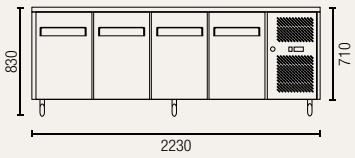



Allow min. 100mm clearance for instalation, all vents must be left clear

Gross volume: 616 L
Exterior dimensions in mm: 2230w x 700d x 830h
Number of adjustable shelves: 4

Temperature set range: -2°C to +8°C
Gross/net weight: 170/150 kg
Energy consumption in 24h: 4.7 kWh

All specifications are subject to change without prior notice