
# specifications

# RF7.UBR.3.SD

## ReFlex Series, 3 Solid Door, Underbench Fridge

Project: _____

Item No: _____

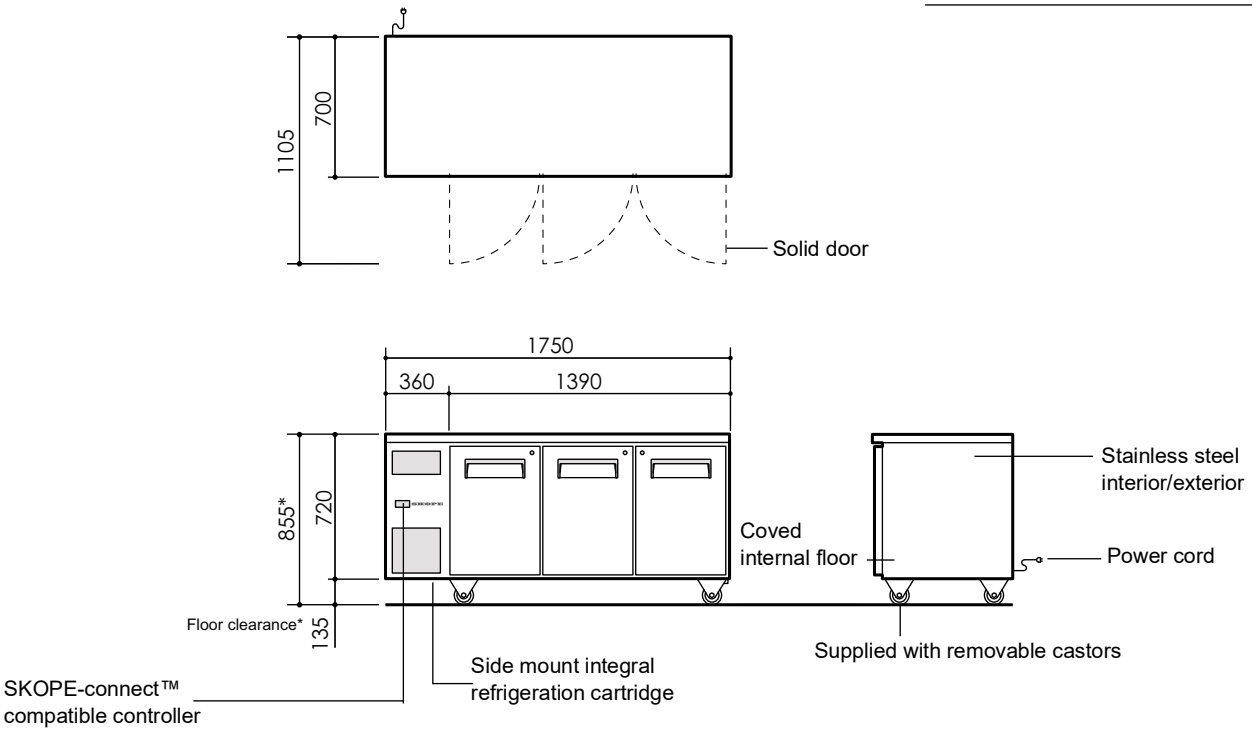


| CABINET | |
|---|---|
| Doors | 3 × self-closing, lockable, solid swing doors. LH, LH, RH |
| Internal door opening | 3 × door openings: 560 mm high × 360 mm wide |
| Shelves | 6 × adjustable height shelves: 4 × outside 395 mm wide × 510 mm deep, 2 × middle 455 mm × 510 mm deep<br>Note: Bottom shelves supplied floor mounted, additional shelf clips are available on request. |
| Worktop | Total thickness 45 mm (0.7 mm 304 AISI stainless steel over insulating cyclopentane foamed core) |
| Material | 304 AISI stainless steel interior and exterior |
| **PERFORMANCE** | |
| Max. ambient temp. | 40°C |
| Temperature range | 1°C to 4°C (adjustable with SKOPE-connect™ -2°C to 15°C) |
| GEMS class | 5M1 |
| GEMS energy consumption | 2.81 kWh/24 h |
| GEMS annual running cost | $308 p.a. (@ $0.30/kWh) |
| **ELECTRICAL** | |
| Electrical safety climate class | 5 |
| Interior lighting | 2 × 400 mm, 4W LED light (door activated) |
| Power cord | Supplied with a 10 amp plug and 2 m lead |
| Power supply | 220-240 volts a.c. 50 Hz, single phase supply |
| Current draw | 2.0 amps (includes unit 1.5 amps) |
| **REFRIGERATION** | |
| Controller | SCS Connect (SKOPE-connect™ compatible) |
| Connectivity interface | Bluetooth wireless technology |
| Refrigeration system | Side mounted, integral, removable refrigeration cartridge (part number ULKCNI-0022) |
| Refrigerant | R290/95 g (natural refrigerant) |
| Nominal capacity | 650 watts |
| Heat rejection (avg/peak) | 120 watts/135 watts |
| Drainage | No plumbing required |

| DIMENSIONS | External | Internal |
|---|---|---|
| Height | 855 mm* | 570 mm |
| Width | 1750 mm | 1280 mm |
| Depth | 700 mm | 530 mm |
| Floor area | 1.23 $m^2$ | |
| Weight | 130 kg | |
| Gross volume | 387 L | |
| Net volume | 319 L | |

* With supplied castors fitted. See height variation below

| Height variation | |
|---|---|
| Supplied castors | 855 mm |
| Height adjustable legs | 865 to 905 mm |
| No castors or legs | 720 mm |

| Dimensional tolerances | | |
|---|---|---|
| Before installing this cabinet allow the following dimensional tolerances: | | |
| **Linear dimensions** | **Overall cabinet dimensions** | |
| Less than 1 metre | ±5 mm | |
| More than 1 metre | -5 mm to +10 mm | |
| | **Length of multiple cabinets** | |
| | **At each joint** | **At each end wall** |
| Less than 1 metre | ±5 mm | +15 mm |
| More than 1 metre | -5 mm to +10 mm | +15 mm |

| Ventilation requirements | |
|---|---|
| Top | Not required |
| Sides | Not required |
| Back | Not required |
| Bottom | Not required |

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2021 SKOPE Industries Limited

PSS0586 Rev. 2.4 Apr. 2023

**SKOPE INDUSTRIES LIMITED**
Australia Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673
Email: skope@skope.com, Website: www.skope.com